
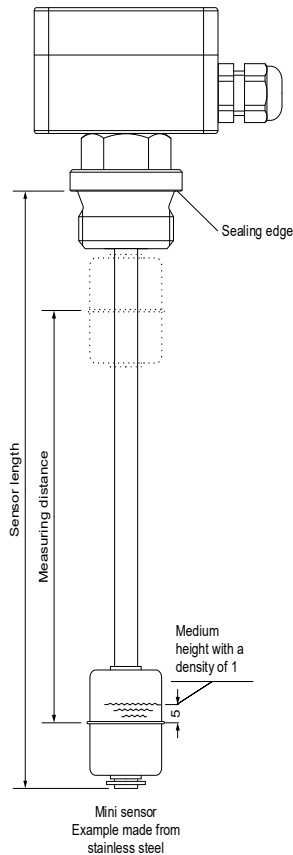


Specification sheet

Mini sensor

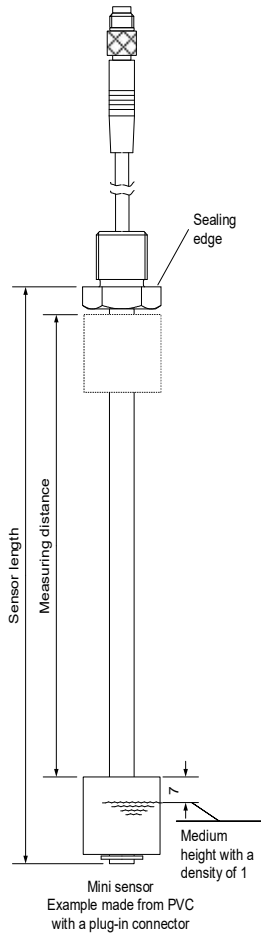

Mechanical characteristics

Mechanical connections	G1/8", G1/4", G3/8", G1/2", G1" (optional incl. counter nut)
Mechanical materials	PVC, PP, PVDF and stainless steel
Float materials	PVC, PP, PVDF and stainless steel
Float dimensions	Ø 16–27 mm
Pipe dimensions	Ø 8 mm
Sensor length	100–1000 mm
Installation types	From the inside, from the outside or an inverted installation
Installation position	Max. 30°

Electrical characteristics

Section of measurements	100–1000 mm (dependent on the float and the grid dimensions)
Measuring grid	5 mm
Electrical connections	Socket, cable, plug-in connector or as per a specific customer request
Socket materials	Aluminium and polyamide
Cable materials	PVC, PUR, silicone, Teflon, FEP or as per a specific customer request
Output signal	Resistance Ω , Current 4–20 mA, Voltage 0–10 V

Environmental influences

Temperature range	-20°C to 110°C (dependent on the float and the material)
Pressure range	Must not be used as a safety-relevant limiting device within the pressure range. P max. upon request; the pressure range is always dependent on the float.
Medium density	Min. 0.7 g/cm ³

Approvals and certificates

Approvals	EX design, food design (electropolishing process)
Protection class	Up to IP68

Comments

Assembly	Installation in assembly possible
Note	The sensors are based on a modular design and can be assembled individually.